



BL2207 LED 7W

9"

Applications

Compact and inconspicuous steplights with two types of faceplates for illumination of pathways and indoor and outdoor stairs.


Specifications

Housing	Die-cast aluminum
Louver	Die-cast aluminum
Cover Frame	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Polycarbonate diffuse lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
Input Voltage	120~277V/AC
Ambient Temperature	-20°C~45°C
Beam Angle	90° Diffuse / Asymmetric(Louver)
Ingress Protection	IP65


Certifications



Dimensions

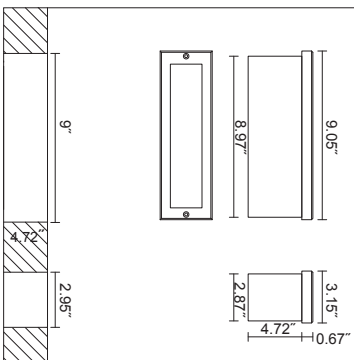

Photometric Data



Ordering Guide:

Example: **BL2207 - S7 - 3 - 80 - D - G - DMG**

1 Series	2 Power	3 CCT	4 Ra	5 Faceplate	6 Faceplate Colour	7 Accessories
BL2207	S7: SMD LED 7W	3: 3000K 4: 4000K 6: 6000K R: Red G: Green B: Blue	80: Ra80 90: Ra90	D: Diffuse L: Louver	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance DMG: 0-10V Dimming

