



Specifications

Housing	Die-cast aluminum
Louver	Die-cast aluminum
Cover Frame	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Polycarbonate diffuse lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
Input Voltage	120~277V/AC
Ambient Temperature	-20°C~45°C
Beam Angle	90° Diffuse/ Asymmetric(Louver)
Ingress Protection	IP65

Certifications




BL2301 LED 10W, 20W 12"


Applications

Compact and inconspicuous steplights with two types of faceplates for illumination of pathways and indoor and outdoor stairs.

Dimensions

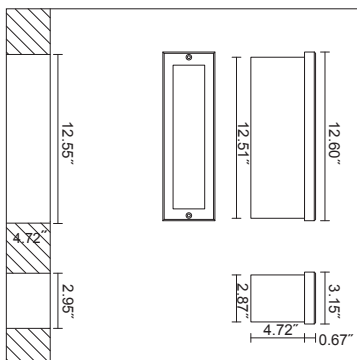

Photometric Data



Ordering Guide:

Example: **BL2301 - S10 - 3 - 80 - D - G - DMG**

1 Series	2 Power	3 CCT	4 Ra	5 Faceplate	6 Faceplate Colour	7 Accessories
BL2301	S10: SMD LED 10W S20: SMD LED 20W	3: 3000K 4: 4000K 6: 6000K R: Red G: Green B: Blue	80: Ra80	D: Diffuse L: Louver	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance DMG: 0-10V Dimming

