




BL6020 LED 24W

Applications

Round downlights ceiling mounted or pendant mounted to provide under-canopy general lighting. Choices of housing colour allow luminaire to blend perfectly with ceiling/canopy finish.

Dimensions

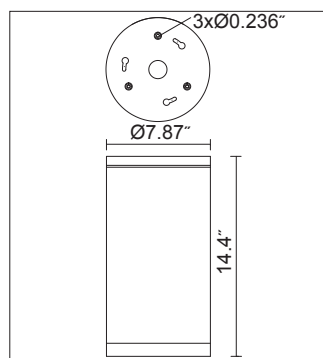

Specifications


Housing	Extruded aluminum
Cover and Side Arm	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Tempered Glass
LED Optic	PMMA Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
Input Voltage	120~277V/AC_except 24V.DC for RGB
Ambient Temperature	-20°C~45°C
Ingress Protection	IP65

Certifications



RGB REQUIRES LISTED REMOTE DRIVER

Photometric Data

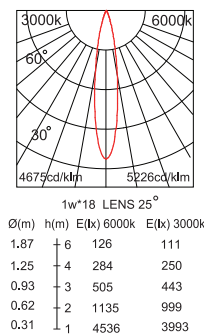

Ordering Guide:

Example: **BL6020 - C24 - 3 - 25 - 80 - G - P**

1 Series	2 Power	3 CCT	4 Beam angle	5 Ra	6 Housing Colour	7 Accessories
BL6020	C24: LED 24W	3: 3000K 4: 4000K 6: 6000K R: Red G: Green B: Blue RGB: R.G.B	15: 15° 25: 25° 38: 38° 45: 45° 60: 60°	80: Ra80	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance P: Pendant mount 3' hanging cable DMG: 0-10V Dimming MT: Mounting plate for standard junction box

