




BL6600 LED 16W, 30W, 42W, 58W


Applications

LED linear floodlight/wall-washer with four choices of wattage/length, multiple beam patterns and side or end tiltable mounting options. Elongated beam pattern perfect for wall-washing. RGBW colour changing compatible with DMX512 control for creating theatrical effects.

Dimensions

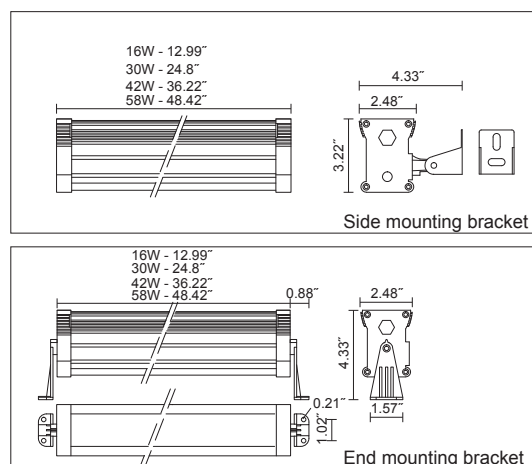


Specifications

Housing	Extruded aluminum
Gasket	Silicone rubber
Front Cover	Tempered Glass
Reflector	PMMA Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
Input Voltage	100~240V/AC_except 24V.DC for RGBW
Ambient Temperature	-20°C~45°C
Ingress Protection	IP65
Certifications	 RGBW REQUIRES LISTED REMOTE DRIVER

Options and Accessories



Beam Patterns

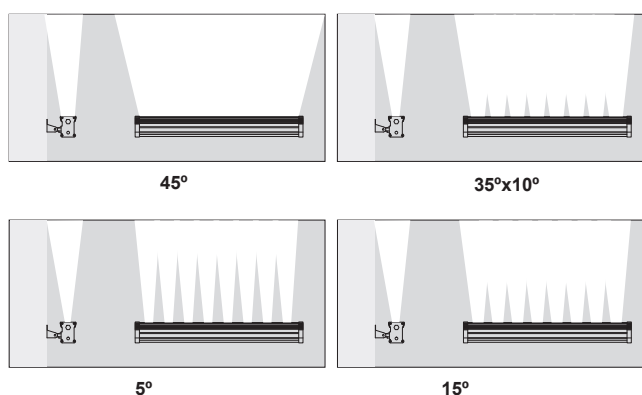

Ordering Guide:

Example: BL6600 - C16 - 4 - 05 - 80 - B - S - T

1 Series	2 Power/Length	3 CCT	4 Beam angle	5 Ra	6 Housing Color	7 Mounting bracket	8 Accessories
BL6600	C16: LED 16W/1' C30: LED 30W/2' C42: LED 42W/3' C58: LED 58W/4'	3: 3000K 4: 4000K 6: 6000K R: Red G: Green B: Blue RGBW: R.G.B.W	05: 5° 15: 15° 25: 25° 45: 45° 60: 60° 3510: H35°xV10°	80: Ra80	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	S: Side mounting bracket E: End mounting bracket	M: Marine ambient corrosion resistance DMG: 0-10V Dimming (not available for C16) T: 15° tilt to wall DC: Daisy chain wiring

