




BL7028 LED 8W, 16W

Applications

LED accent light with multiple beam patterns and retractable shrouds, twin heads each 360° rotatable and 180° tiltable, ideally suited for accent lighting. Mounting bracket supports two fixtures, aiming of each independently adjustable. TRIAC dimming standard.

Dimensions

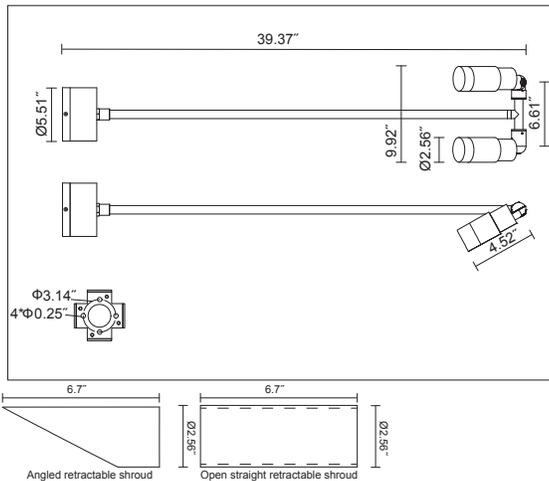

Specifications

Housing	Die-cast aluminum
Gasket	Silicone rubber
Front Cover	Tempered Glass
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current, TRIAC dimming standard
Input Voltage	120V/AC
Ambient Temperature	-20°C~45°C
Ingress Protection	IP65

Certifications



Options and Accessories

Shroud



Housing Color



Ordering Guide:

Example: **BL7028 - C16 - 4 - 15 - 80 - AS - B - H**

1 Series	2 Power	3 CCT	4 Beam angle	5 Ra	6 Shroud	7 Housing Color	8 Accessories
BL7028	C8: COB 4W x2 C16: COB 8W x2	3: 3000K 4: 4000K	15: 15° 25: 25° 30: 30° 4020: H40°xV20°	80: Ra80	NS: No shroud AS: Angled retractable shroud OS: Open straight retractable shroud	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	H: Honeycomb Louver M: Marine ambient corrosion resistance (TRIAC dimming standard)



AN AMERICAN COMPANY