




BL7067 LED 10W, 15W

Applications

LED accent light with multiple beam patterns and retractable shrouds, 360° rotatable and 180° tiltable, ideally suited for accent lighting. Mounting bracket extends fixture setback to enable broader coverage of target vertical surface while the miniature size keeps fixture and bracket images inconspicuous. TRIAC dimming standard.

Dimensions

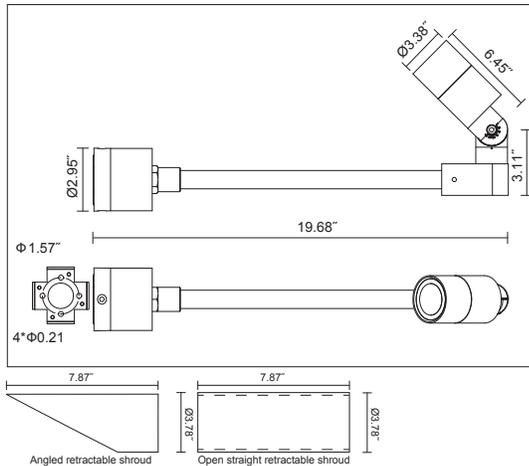

Specifications

Housing	Die-cast aluminum
Gasket	Silicone rubber
Front Cover	Tempered Glass
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current, TRIAC dimming standard
Input Voltage	120V/AC
Ambient Temperature	-20°C~45°C
Ingress Protection	IP65

Certifications



Options and Accessories

Shroud					
	No shroud	Angled retractable shroud	Open straight retractable shroud		
Housing Color					
	Black RAL9011	White RAL9016	Gray RAL7012	Mineral bronze	Silver RAL9006
	Horizontal spread H45°xV23°	Honeycomb Louver			

Ordering Guide:

Example: BL7067 - C10 - 4 - 20 - 80 - NS - B - H

1 Series	2 Power	3 CCT	4 Beam angle	5 Ra	6 Shroud	7 Housing Color	8 Accessories
BL7067	C10: COB 10W C15: COB 15W	3: 3000K 4: 4000K	20: 20° 40: 40° 60: 60° 4523: H45°xV23°	80: Ra80	NS: No shroud AS: Angled retractable shroud OS: Open straight retractable shroud	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	H: Honeycomb Louver M: Marine ambient corrosion resistance (TRIAC dimming standard)

