



BL7169 LED 6W


Applications

LED mini-accent light with multiple beam patterns and retractable shrouds, twin heads each 360° rotatable and 180° tiltable, ideally suited for highlighting small objects or small target surfaces. Mounting bracket extends fixture setback to enable broader coverage of target vertical surface and supports two fixtures, aiming of each independently adjustable.

Specifications

Housing	Die-cast aluminum
Gasket	Silicone rubber
Front Cover	Tempered Glass
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current / No (integral) Dimming
Input Voltage	100~277V/AC
Ambient Temperature	-20°C~45°C
Ingress Protection	IP65
Certifications	

Dimensions

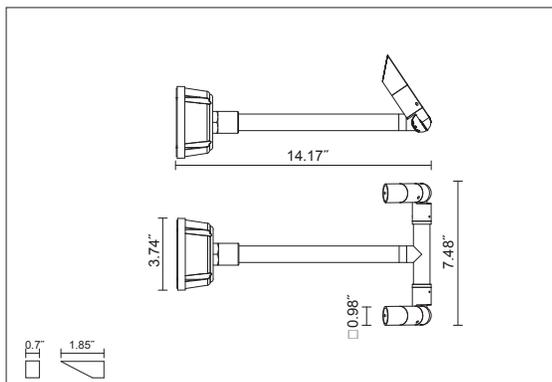

Options and Accessories

Shroud

No shroud  Angled shroud 

Housing Color

Black RAL9011  White RAL9016  Gray RAL7012  Mineral bronze  Silver RAL9006 

Horizontal spread H35°xV15°  Tree strap  Ground Stake 

Ordering Guide:

Example: **BL7169 - C6 - 4 - 15 - 80 - AS - B - S**

1 Series	2 Power	3 CCT	4 Beam angle	5 Ra	6 Shroud	7 Housing Color	8 Accessories
BL7169	C6: LED 3W x2	3: 3000K 4: 4000K 6: 6000K	08: 8° 15: 15° 25: 25° 30: 30° 3515: H35°xV15°	80: Ra80	NS: No shroud AS: Angled shroud	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	S: Ground Stake P: Tree strap M: Marine ambient corrosion resistance

