

### BL2001 LED 4W

#### Applications


Low voltage surface mounted step light with smooth baffle, elegant and discreet, ideally suited for illuminating pathways and architectural surface perimeters.

#### Specifications


Housing	Die-cast aluminum
Baffle Faceplate	Die-cast aluminum
Gasket	Silicone rubber
LED Optic	Tempered Glass
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
Input Voltage	24V/DC
Ambient Temperature	-20°C~45°C
Beam Angle	Asymmetric
Ingress Protection	IP65

Certifications  Driver

#### Dimensions

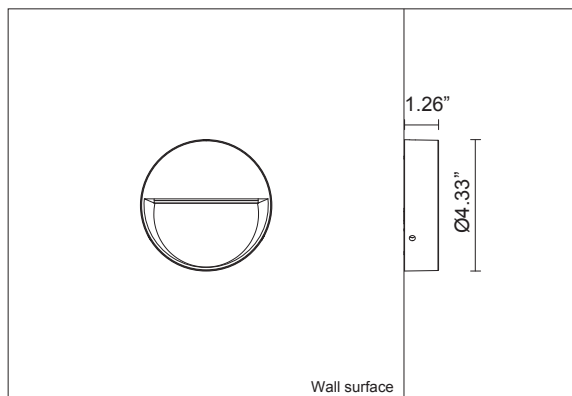

#### Photometric Data



#### Ordering Guide:

Example: **BL2001 - C4 - 4 - 80 - B - M**

1 Series	2 Power	3 CCT	4 Ra	5 Housing Color	6 Accessories
BL2001	C4: LED 4W	3: 3000K 4: 4000K 6: 6000K	80: Ra80	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance

