


BL2005 LED 15W


Applications

Surface mounted step light with choices of smooth and stepped baffles, elegant and discreet, ideally suited for illuminating pathways and architectural surface perimeters.


Specifications

Housing	Die-cast aluminum
Baffle Faceplate	Die-cast aluminum
Gasket	Silicone rubber
LED Optic	Tempered Glass
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
Input Voltage	120~277V/AC
Ambient Temperature	-20°C~45°C
Beam Angle	Asymmetric
Ingress Protection	IP65
Certifications	

Photometric Data

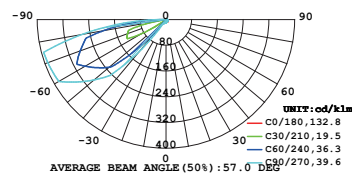

Dimensions

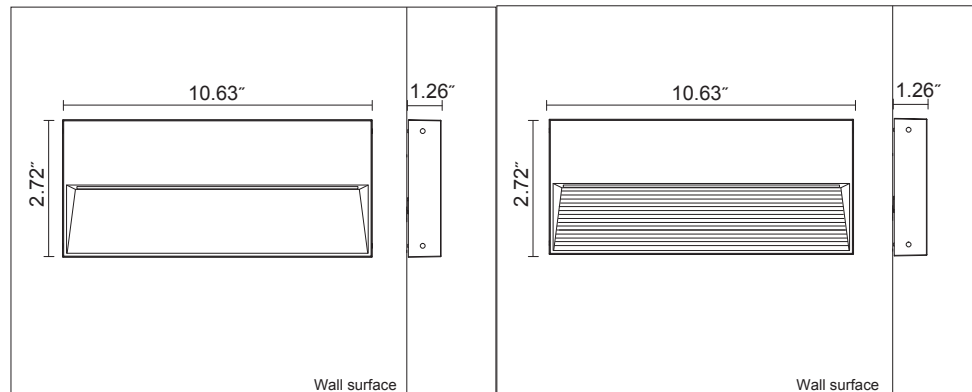

Ordering Guide:

Example: BL2005 - C15 - 4 - 80 - SM - B

1 Series	2 Power	3 CCT	4 Ra	5 Baffle	6 Faceplate colour	7 Accessories
BL2005	C15:LED 15W	3: 3000K 4: 4000K 6: 6000K	80: Ra80	SM: Smooth ST: Stepped	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance DMG: 0-10V Dimming

