BRADLEY LIGHTING

POLARIS
BL7303 BL7304

BL7303 LED 6W, BL7304 LED 11W

Specifications

Housing	Die-cast aluminum
Gasket	Silicone rubber
Front Cover	Tempered Glass
Reflector	Anodized aluminum 1090
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
Input Voltage	100~277V/AC
Ambient Temperature	-20°C~45°C
Ingress Protection	IP65
Certifications	Intertek

Applications

COB LED floodlights with two styles of gear boxes, multiple beam angle options and glare shields for mounting on ground, walls and lawns in commercial and residential applications of accent lighting, façade lighting and landscape lighting.

Dimensions

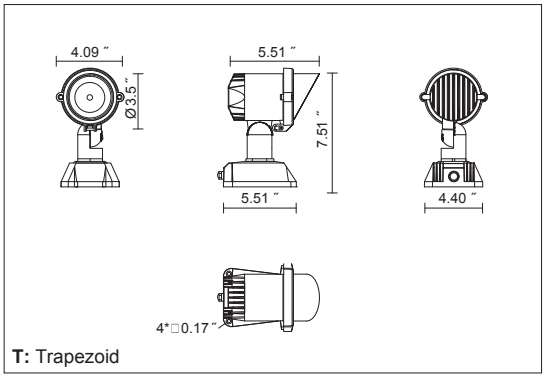

T: Trapezoid

Options and Accessories

Cover Frame

Housing Color

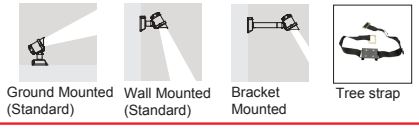

Ordering Guide:

Example: BL7303 C6 - 4 - 30 - 80 - CV - T - B - S

1 Series Power	2 CCT	3 Beam angle	4 Ra	5 Cover Frame	6 Gear box	7 Housing Color	8 Accessories
BL7303 C6: COB 6W **BL7304 C11:** COB11W	**3:** 3000K **4:** 4000K **5:** 5000K	**15:** 15° **30:** 30° **40:** 40° **4020:** H40°xV20°	**80:** Ra80	**CR:** Ring **CV:** Upper visor **CF:** Full visor	**R:** Round **T:** Trapezoid	**B:** Black RAL9011 **W:** White RAL9016 **G:** Gray RAL7012 **Z:** Mineral bronze **S:** Silver RAL9006	**S:** Ground Stake **P**: Tree strap **H**: Honeycomb Louver **B3**: 3ft bracket **B6**: 6ft bracket **M**: Marine ambient corrosion resistance **MT**: Mounting plate for standard junction box

AN AMERICAN COMPANY