



BL5028 LED 20W, 35W

Applications

LED bollard featuring a sleek appearance of extruded aluminium column with choices of height and surface finish and creating an axially symmetric, broad and uniform beam spread, ideally suited for illumination of walkways, entrances and access roads.


Specifications

Housing body	Extruded aluminum
Housing Top	Die-cast aluminum
Gasket	Silicone rubber
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
Input Voltage	120~277V/AC
Ambient Temperature	-20°C~45°C
Light Aperture	360°
Ingress Protection	IP65

Certifications




Dimensions

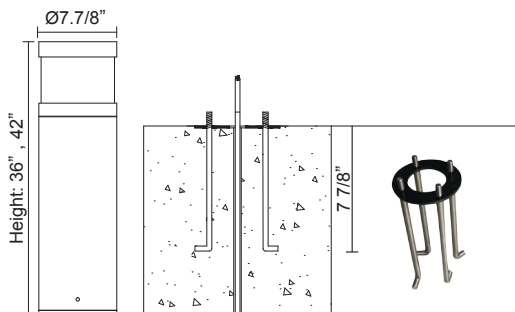

Four anchor bolts included (standard)

Photometric Data

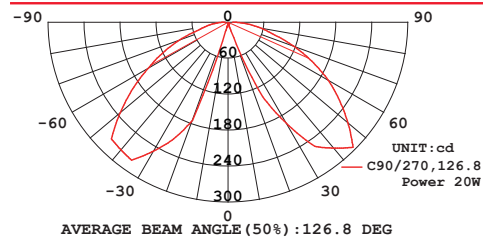

Ordering Guide:

Example: ¹BL5028 - ²C20-36-8 - ³4 - ⁴80 - ⁵B - ⁶DMG

1 Series	2 Power-Height-Diameter	3 CCT	4 Ra	5 Housing Color	6 Accessories
BL5028	C20-36-8: LED 20W-36"-8" C35-36-8: LED 35W-36"-8" C35-42-8: LED 35W-42"-8"	3: 3000K 4: 4000K 6: 6000K	80: Ra80	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance DMG: 0-10V Dimming (For 20W only)

