



BL5035 LED 5W

Applications


LED bollard featuring a sleek appearance of extruded aluminium column with choices of height and surface finish. The 180° light aperture is ideally suited for illumination of walkways, entrances and access roads where light cutoff is required on either side of the passage.

Specifications

Housing body	Extruded aluminum
Housing Top	Die-cast aluminum
Gasket	Silicone rubber
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
Input Voltage	120~277V/AC
Ambient Temperature	-20°C~45°C
Light Aperture	180°
Ingress Protection	IP65


Certifications 

Dimensions

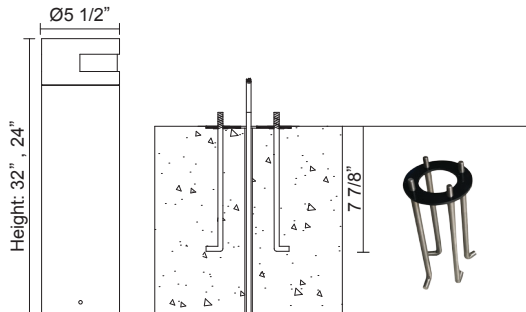

Four anchor bolts included (standard)

Photometric Data



Ordering Guide:

Example: **BL5035 - C5-24-6 - 4 - 80 - B - M**

1 Series	2 Power-Height-Diameter	3 CCT	4 Ra	5 Housing Color	6 Accessories
BL5035	C5-24-6: LED 5W-24"-6" C5-32-6: LED 5W-32"-6"	3: 3000K 4: 4000K 6: 6000K	80: Ra80	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance

