



### BL5036 LED 15W

#### Applications

LED bollard featuring a sleek appearance of extruded aluminium column with choices of height and surface finish. The 180° light aperture is ideally suited for illumination of walkways, entrances and access roads where light cutoff is required on either side of the passage.


#### Specifications

Housing body	Extruded aluminum
Housing Top	Die-cast aluminum
Gasket	Silicone rubber
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
Input Voltage	120~277V/AC
Ambient Temperature	-20°C~45°C
Light Aperture	180°
Ingress Protection	IP65

#### Certifications




#### Dimensions

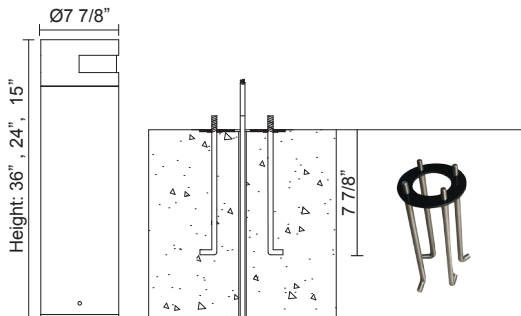

Four anchor bolts included (standard)

#### Photometric Data



#### Ordering Guide:

Example: **BL5036 - C15-24-8 - 4 - 80 - B - DMG**

1 Series	2 Power-Height-Diameter	3 CCT	4 Ra	5 Housing Color	6 Accessories
BL5036	C15-15-8: LED 15W-15"-8" C15-24-8: LED 15W-24"-8" C15-36-8: LED 15W-36"-8"	3: 3000K 4: 4000K 6: 6000K	80: Ra80	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance DMG: 0-10V Dimming

