



BL5060 LED 13W, 23W Stainless Steel

Applications

LED bollard featuring a sleek appearance of stainless steel column housing for illumination of walkways, entrances and access roads. LED's light is directed onto a conical reflector which, in turn, creates an axially symmetric, broad and uniform beam spread.


Specifications

Housing	Stainless steel SS304
Gasket	Silicone rubber
Cover Window	Polycarbonate
Reflector	Aluminum, sand-blasted
Driver Type	Constant voltage
Input Voltage	100~240V/AC
Ambient Temperature	-20°C~45°C
Light Aperture	360°
Ingress Protection	IP65

Certifications




Dimensions

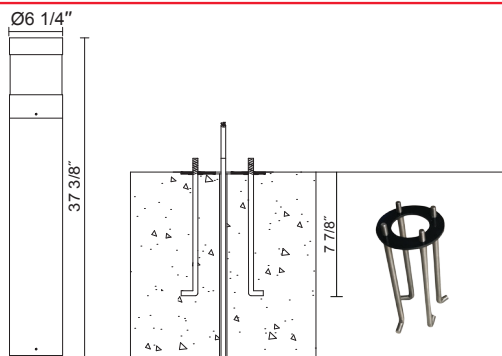

Four anchor bolts included (standard)

Photometric Data



Ordering Guide:

Example: **BL5060 - S13-37-6 - 3 - 80 - N**

1 Series	2 Power-Height-Diameter	3 CCT	4 Ra	5 Housing Finish
BL5060	S13-37-6: LED 13W-37.4"-6" S23-37-6: LED 23W-37.4"-6"	3: 3000K 4: 4000K 6: 6000K R: Red G: Green B: Blue	80: Ra80	N: Natural steel B: Black finish W: White finish G: Gray finish Z: Bronze finish S: Silver RAL9006

