




BL8114 LED 6.5W, 10W, 14W

Applications

Ingrade uplight with DMX controlled RGB colour changes as well as dimmable white light, multiple beam angle options including asymmetric spread, and adjustable aiming by manual tilting up to +/-15°, ideally suited for burial installations in concrete and lawns for grazing walls and columns, highlighting art objects such as sculptures and lighting up trees and bushes.

Dimensions

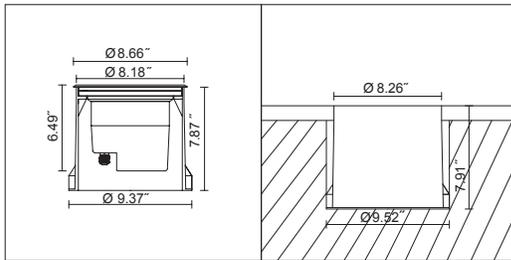

Specifications


Housing	Die-cast aluminum
Gasket	Silicone rubber
Top Cover	Clear Tempered Glass
LED Optic	PMMA Lens
Bezel	Stainless steel
Driver Type	Constant current
Input Voltage	100~277V/AC, except 24V.DC for RGB
Ambient Temperature	-20°C~45°C
Adjustable Aiming	Manual tilting ±15°(Standard)

Certifications	 RGB REQUIRES LISTED REMOTE DRIVER
----------------	---

Ingress Protection



Photometric Data



Accessories



Ordering Guide:

Example: **BL8114 - C10 - 3 - 08 - 80 - S4 - H**

1 Series	2 Power	3 CCT	4 Beam angle	5 Ra	6 Bezel	7 Accessories
BL8114	C6.5: LED 6.5W C10: LED 10W C14: LED 14W	3: 3000K 4: 4000K 6: 6000K R: Red G: Green B: Blue RGB: R.G.B	05: 5° 15: 15° 25: 25° 45: 45° 60: 60° 4614: H46°xV14°	80: Ra80	S4: 304 Stainless steel S6: 316 Stainless steel	H: Honeycomb Louver M: Marine ambient corrosion resistance DMG: 0-10V Dimming for C10 and C14 only

