



BL8126 LED 44W

Applications

Ingrade uplight with COB white light and reflector, multiple beam angle choices including asymmetric spread, and adjustable aiming by manually tilting up to +/- 15°. Optional dimming. Ideally suited for burial installations in concrete and lawns for grazing walls and columns, highlighting art objects such as sculptures and lighting up trees and bushes.

Specifications


Housing	Die-cast aluminum
Gasket	Silicone rubber
Top Cover	Clear Tempered Glass
Reflector	Polycarbonate
Bezel	Stainless steel
Driver Type	Constant current
Input Voltage	120~277V/AC
Ambient Temperature	-20°C~45°C
Adjustable Aiming	Manual tilting ±15°, Horizontal rotation 360°

Certifications	
----------------	---


Ingress Protection



Dimensions



Photometric Data

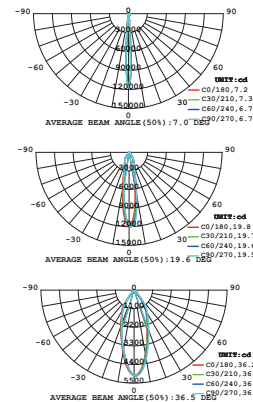

Accessories



Ordering Guide:

Example: **BL8126 - C44 - 3 - 08 - 80 - S4 - H**

1 Series	2 Power	3 CCT	4 Beam angle	5 Ra	6 Bezel	7 Accessories
BL8126	C44: COB 44W	3: 3000K 4: 4000K 5: 5000K	08: 8° 18: 18° 36: 36° 72: 72° 5520: H55°xV20°	80: Ra80	S4: 304 Stainless steel S6: 316 Stainless steel	H: Honeycomb Louver M: Marine ambient corrosion resistance DMG: 0-10V Dimming

