




Specifications


| | |
|---------------------|---|
| Housing | Extruded aluminum |
| Cover and Side Arm | Die-cast aluminum |
| Gasket | Silicone rubber |
| Cover Lens | Tempered Glass |
| LED Optic | PMMA Lens |
| Surface Finish | AkzoNobel powder coating |
| Driver Type | Constant current |
| Input Voltage | 120~277V/AC_except 24V.DC for RGB |
| Ambient Temperature | -20°C~45°C |
| Ingress Protection | IP65 |
| Certifications |  RGB REQUIRES LISTED REMOTE DRIVER |

BL6024 LED 21Wx2, 21W


Applications

Round wall sconces, with both uplight and downlight, or either uplight or downlight, and multiple beam angle choices, to graze columns or to create light level contrast on wall façade. Asymmetric up/down beam angles create patterns of enhanced visual interest. Choices of housing colour allow the luminaire to blend perfectly with exterior architectural colours under daylight.

Dimensions

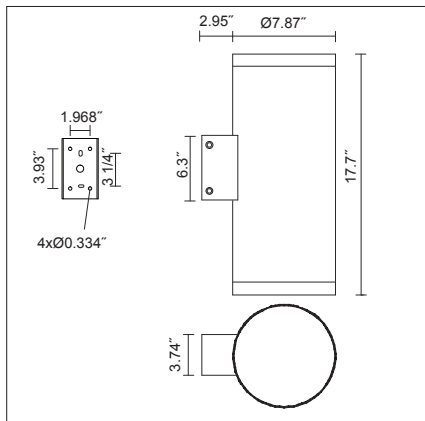

Photometric Data

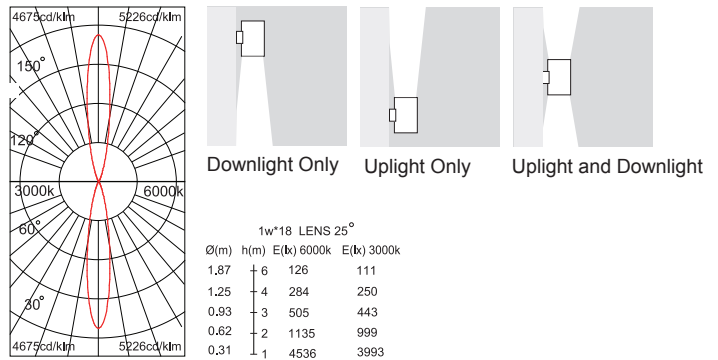

Ordering Guide:

Example: BL6024 - C42 - 3 - 25 - 80 - G - T

| Series | Power | CCT | Beam angle | Ra | Housing Colour | Accessories |
|--|----------------|---|---|----------|---|---|
| BL6024 | C42: LED 21Wx2 | 3: 3000K 4: 4000K 6: 6000K | 15: 15° 25: 25° 38: 38° | 80: Ra80 | B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006 | T: 20° tilt to wall M: Marine ambient corrosion resistance DMG: 0-10V Dimming MT: Mounting plate for standard junction box |
| BL6024D: Downlight BL6024U: Uplight | C21: LED 21W | R: Red G: Green B: Blue RGB: R.G.B | 45: 45° 60: 60° 1560: UP15°XDown60° | | | |

